
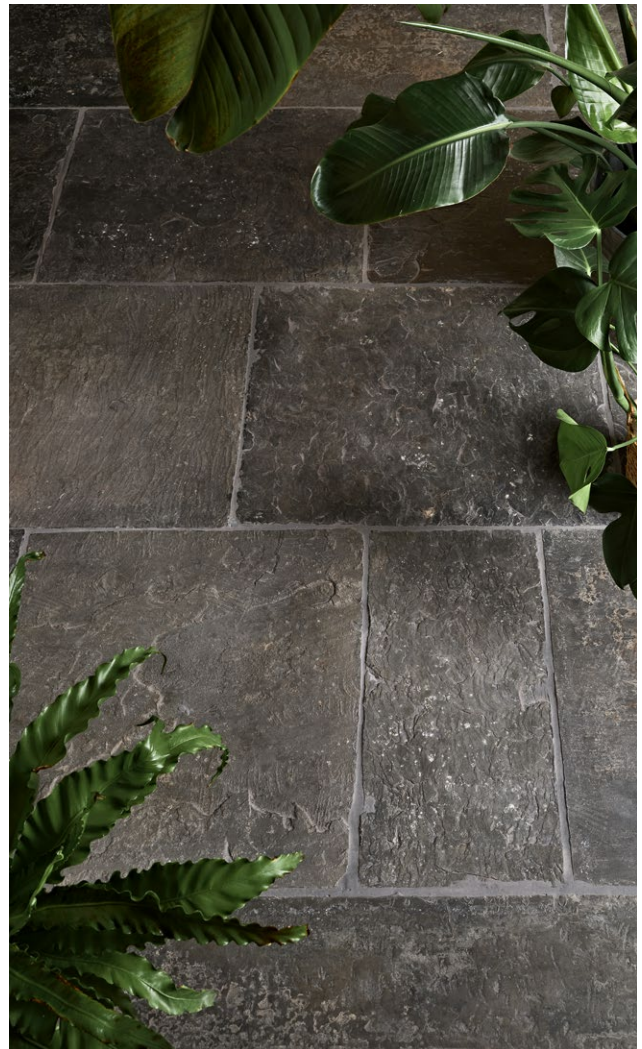


# Beaumont

SANDSTONE | WEATHERED

An ingenious process is applied to this moody, rustic sandstone, which gives a rugged, ancient-looking effect - giving a product that gives a convincing reclaimed flagstone look.

Suitability: Domestic/heavy commercial interior floors, external paving, sealing required



## Formats

Format	Availability
60 x Random x 2.2cm	Usually in stock

## Technical Data

Test	Standard	Result
Apparent Density	BS EN 1936 : 2006	2539kg/m <sup>3</sup>
Open Porosity	BS EN 1936 : 2006	4.7%
Water Absorption at Atmospheric Pressure	BS EN 13755 : 2008	2.9%
Flexural Strength (3 Point)	BS EN 12372 : 2006	43MPa
Frost Resistance (56 Cycles)	BS EN 12371 : 2010	3MPa
Abrasion Resistance	BS EN 14157 : 2004	17.5mm
Slip Resistance (Dry)	BS EN 14231 : 2003	PTV 84.9
Slip Resistance (Wet)	BS EN 14231 : 2003	PTV 81.1

- ✓ Suitable for use with underfloor heating
- ✓ Suitable for use in wet areas
- ✓ Suitable for use in freezing temperatures

**For any further information or advice, please contact our team.**

### Installation, Care & Maintenance Advice

Please refer to the installation guides on our website.

### Product Notes

Please note that this product will have some thickness variation as a result of the riven process used to create the surface. When installing it is important to always use a substantial adhesive/mortar bed. When used externally, the appearance of this stone will change over time. For more information on this, please see the info sheet 'Understanding Weathering of Natural Stone' on our website.