


Trafalgar


SANDSTONE | ETCHED/TUMBLED

A smooth, homogeneous ivory-greige European sandstone, with exceptionally fine grain for superior weather resistance.


Suitability: External paving, pool surrounds, sealing required



PAVING

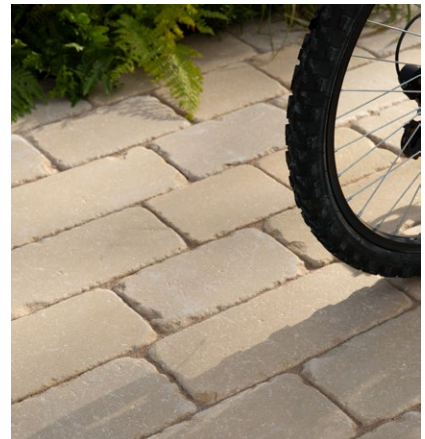

COBBLES

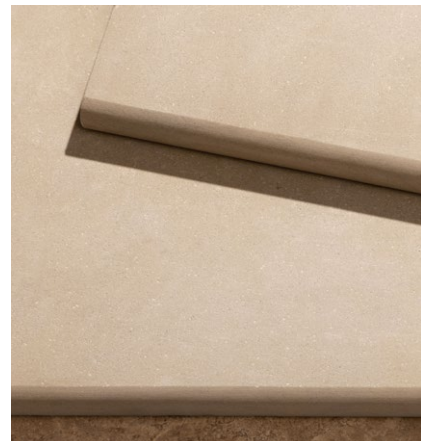

BULLNOSE COPING

Formats

Option	Format	Availability
Paving	60 x 90 x 3cm (Etched)	Usually in stock
Cobbles	14 x Random x 4cm (Tumbled)	Usually in stock
Bullnose coping	40 x 100 x 4cm (Etched)	Usually in stock

Bespoke Options | Large format slabs available



Technical Data

Test	Standard	Result
Apparent Density	BS EN 1936 : 2006	2360kg/m ³
Open Porosity	BS EN 1936 : 2006	12.5%
Water Absorption at Atmospheric Pressure	BS EN 13755 : 2008	5.2%
Flexural Strength (3 Point)	BS EN 12372 : 2006	9.7MPa
Frost Resistance (56 Cycles)	BS EN 12371 : 2010	9.3MPa
Abrasion Resistance	BS EN 14157 : 2004	37.5mm
Compressive Strength	BS EN 1926 : 2006	77MPa
Slip Resistance (Etched) (Dry)	BS EN 14231 : 2003	PTV 96

- ✓ Suitable for use in wet areas
- ✓ Suitable for use in freezing temperatures

For any further information or advice, please contact our team.

Installation, Care & Maintenance Advice

Please refer to the installation guides on our website.

Product Notes

When used externally, the appearance of this stone will change over time. For more information on this, please see the info sheet 'Understanding Weathering of Natural Stone' on our website.