


# Linton

BRITISH SANDSTONE | HONED

An unusual, white-grey sandstone from Yorkshire, with occasional black flecks and a uniform tone, perfect for contemporary landscapes.


Suitability: External paving, pool surrounds, sealing required



PAVING



SPLITFACE COBBLES

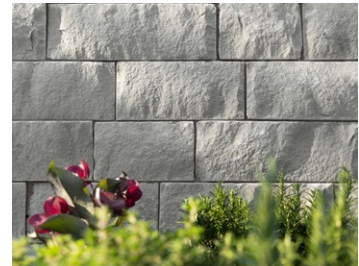

WALLING STONE



BULLNOSE COPING

## Formats

Option	Format	Availability
Paving	60 x Random x 4cm	Special order
Bullnose coping	40 x 100 x 4cm	Special order
Splitface Cobbles/Walling Stone	14 x Random x 6.5cm	Special order
Slab 4cm	-	Special order

Bespoke Options



## Technical Data

Test	Standard	Result
Bulk Density	BS EN 1936 : 2006	2320kg/m <sup>3</sup>
Water Absorption at Atmospheric Pressure	BS EN 13755 : 2008	4.38%
Flexural Strength (3 Point)	BS EN 12372 : 2006	12.9MPa
Compressive Strength	BS EN 1926 : 2006	106MPa

- ✓ Suitable for use in wet areas
- ✓ Suitable for use in freezing temperatures

**For any further information or advice, please contact our team.**

### Installation, Care & Maintenance Advice

Please refer to the installation guides on our website.

### Product Notes

When used externally, the appearance of this stone will change over time. For more information on this, please see the info sheet 'Understanding Weathering of Natural Stone' on our website.